Supplementary Material

Blind loci and design criteria for integral load-monitoring channels on continuous girder bridges, with laboratory verification and an assessment on public field records

Quoc-Bao Nguyen, Thai-Son Vu, Hung-Son Nguyen

This document accompanies the main text. Sections S1–S8 follow items (i)–(xi) of the Supplementary Material statement in the main text. Equation, table and figure numbers without the prefix S refer to the main text.

S1. Scripts, console output and derived data (items i–ii)

The archive `scripts.zip` contains the analysis scripts and the console output of every run. `README.md` in the archive maps every table and figure of the main text and of this document to a script and a log file. `run_all.sh` reruns the closed forms and their FE verification, the multi-channel placement study and Monte Carlo simulation, the identifiability analysis of the in-service girder, the processing of the public field records and the laboratory evaluation. The derived data behind every figure and table are provided as CSV files in the same archive. The raw field records are not redistributed; they are available from the NOR-BWIM dataset (https://doi.org/10.7294/26880898.v1).

S2. Laboratory specimen and data (item iii)

The specimen is a steel hollow square tube on three supports forming two equal spans of 2500 mm; its measured single-load influence line is shown in Fig. S1. Table S1 lists the mid-span deflection of the first span for all three load configurations; the order of the three-load group is the best-fitting order discussed in Section 3.

Table S1. Mid-span deflection of the first span (mm), mean of three cycles. Single load 40.64 N; analytical values from the closed-form influence line.

x (mm)	Analytical, single	Measured, single	Two loads	Three loads
0	0.0000	0.0000	0	0
250	0.8874	0.8844	0.4625	0.5525
500	1.6968	1.6975	1.8813	1.0450
750	2.3501	2.3525	3.1413	2.5413
1000	2.7693	2.7738	4.0988	4.8700
1250	2.8764	2.8827	4.6350	6.7588

x (mm)	Analytical, single	Measured, single	Two loads	Three loads
1500	2.6253	2.6363	4.6238	7.9350
1750	2.0980	2.1100	4.0688	8.2775
2000	1.4087	1.4213	3.1375	7.6825
2250	0.6713	0.6838	1.9600	6.2800
2500	0.0000	0.0000	0.7715	4.3725
2750	−0.5132	−0.5069	−0.2689	2.2975
3000	−0.8644	−0.8556	−1.0063	0.3021
3250	−1.0715	−1.0600	−1.4988	−1.2588
3500	−1.1526	−1.1438	−1.7813	−2.3650
3750	−1.1255	−1.1200	−1.8600	−3.0363
4000	−1.0085	−1.0013	−1.7738	−3.3300
4250	−0.8194	−0.8175	−1.5525	−3.2663
4500	−0.5763	−0.5816	−1.2213	−2.9450
4750	−0.2971	−0.3019	−0.8125	−2.4125
5000	0.0000	0.0000	−0.3325	−1.7088
5250			0	−1.0713
5500				−0.3650
5750				0

S3. Field records: tables and processing details (item iv)

Table S2. Integral constant C and its scatter over the runs, lane A unless stated. CV expected: coefficient of variation predicted from the measured vehicle-free noise. For ch1, ch2, ch8 and ch9 the residual variance is 2.9–5.1 times the vehicle-free noise variance.

Day, channel	Runs	C (με m/t), 95 % CI	CV observed (%)	CV expected (%)	χ^2 p
1, ch11 (best)	7	−5.85 (−6.17, −5.53)	5.8	6.8	0.60
1, gauge average (4 wheel-path gauges)	7	−4.03 (−4.24, −3.82)	5.6	6.1	0.53
1, ch1, ch2, ch8, ch9	7	−1.49 to −2.38	17.2–19.1	7.8–11.0	≤ 0.012
2, st36	8	−5.97 (−6.57, −5.38)	12.0	16.5	0.73
2, gauge average (4 gauges)	8	−4.12 (−4.62, −3.63)	14.4	20.2	0.79
2, lane B, average	8	−3.27 (−4.19, −2.35)	33.7	23.2	0.027

Table S3. Ratio of the integral constants of two trucks, lane A unless stated. Day 1: second to first truck, both 3-axle; day 2: 5-axle to 3-axle truck. Equivalence by two one-sided tests

(TOST) at the 5 % level: the 90 % CI of the ratio lies inside the stated margin (for ch11, 0.904–1.098), so a 95 % CI can extend beyond a margin that is shown.

Day, channel	Ratio (95 % CI)	Equivalence
1, ch11 (best)	0.996 (0.874–1.136)	shown within ±10 %
1, gauge average (4 wheel-path gauges)	0.955 (0.863–1.057)	shown only within ±11.8 %
1, ch1, ch2, ch8, ch9	0.740–0.783	invariance rejected (CIs exclude 1)
2, st36	1.005 (0.735–1.375)	not shown
2, gauge average (4 gauges)	0.978 (0.697–1.374)	shown only within ±26.7 %
2, lane B, average	0.749 (0.440–1.276)	– (constants fail the χ^2 test, Table S2)

Table S4. Correlation between gauges of the integrated strain: means over gauge pairs, with 95 % bootstrap CIs in brackets. Vehicle-free windows: 1227 on day 2 and 3405 on day 1. Crossing residual: deviation of a crossing's integral from its calibrated value. –: not computed.

Correlation of	Day 2, 4 gauges	Day 1, 12 gauges
vehicle-free noise, non-overlapping windows	0.92 (0.83–0.96)	0.42 (0.26–0.54)
vehicle-free noise, window length of each crossing	0.90	–
crossing residuals	0.63	–
crossing residuals, st40 with its neighbours	0.30–0.37	–

Table S5. Day 2: per-crossing standard deviation (SD) of the gross weight predicted by two covariance models, and the observed error (% of GVW). SD and MAE are different measures; the table compares the order of the two estimators, not magnitudes.

Quantity	GLS, measured Σ	Gauge average
SD predicted from the vehicle-free covariance	12.7	19.8
SD predicted from the covariance of the crossing residuals	21.0	14.6
Observed MAE, leave-one-run-out (main text Table 3)	20.4	11.9

Table S6. Mean absolute error of the gross weight (% of GVW), out of sample, with 95 % bootstrap CIs over the test runs (n = 8 on day 2, n = 7 on day 1). LOTO: calibrated on one truck, tested on the other.

Estimator	Day 2, leave-one-run-out	Day 2, LOTO	Day 1, 12 gauges	Day 1, 4 wheel-path gauges
Best single gauge (chosen after the	8.4 (2.9–15.3)	7.6	4.8 (1.8–7.9)	4.8 (1.8–7.9)

Estimator	Day 2, leave-one-run-out	Day 2, LOTO	Day 1, 12 gauges	Day 1, 4 wheel-path gauges
fact)				
Worst single gauge	27.9 (12.9–44.5)	24.3	17.6 (11.0–23.4)	12.1
Gauge average	11.9 (6.0–18.6)	11.1	5.3 (2.5–7.8)	5.4 (3.3–7.4)
GLS, diagonal Σ	11.4 (6.0–18.0)	10.8	5.3 (2.5–8.0)	5.2 (3.3–7.1)
GLS, measured Σ	20.4 (12.3–28.8)	17.7	5.8 (3.5–8.1)	4.9 (3.0–6.9)
Zero-sum, measured Σ	20.3 (12.4–28.6)	18.0	6.0 (2.9–9.3)	8.3 (3.9–13.4)
Zero-sum, Σ = identity matrix	12.3 (6.1–20.2)	10.8	13.0 (7.1–19.0)	8.4 (4.6–12.9)
Mean weight of the calibration runs	2.0 (1.9–2.0)	3.4	2.2 (1.1–3.5)	2.2 (1.1–3.5)

Processing details and further results:

- Bridge depth: about 3.8 m at mid-span and 9.5 m at the piers. Sampling: 100 Hz on day 1, 200 Hz on day 2.
- Day-1 driver-reported gross weights: 21.2–22.8 t for the runs used.
- Speeds were obtained from the axle spikes and the measured wheelbase and agree with the dataset authors' processing script within 1–2 %. Records were integrated over the whole time the truck was on the bridge plus 5 s at each end. Three day-1 runs with two trucks on the bridge and four passes without documented weights were excluded. Vehicle-free noise windows were at least 70 s from any detected vehicle.
- Day 1: eight of the twelve gauges have a coefficient of variation of 5.8–13.5 %, consistent with the noise (χ^2 p = 0.13–0.71). The first truck ran at 10.4–12.8 m/s and the second at 19.1–19.8 m/s. Day 2 speeds: 13–28 m/s; no speed effect resolved (+6 % per 10 m/s, 95 % CI −23 to +35 %).
- Day-2 noise amplitudes at the median speed: 13.7–32.8 με m.
- Day-2 per-crossing SD predicted by the vehicle-free covariance (% of GVW): best single gauge 16.2, worst single gauge 32.5, gauge average 19.8, GLS diagonal Σ 19.4, GLS measured Σ 12.7, zero-sum measured Σ 13.3, zero-sum Σ = identity 16.1.
- Lane B, failing channels: CV 31–40 %, χ^2 p = 0.016–0.027.
- GLS weights with the measured Σ: st40 +0.16, st36 −0.35. GLS with Σ estimated from the crossing residuals: error 10.4 % of GVW in sample, 28.4 % out of sample.
- Lane B: st36 ratio 0.64 (95 % CI 0.47–0.81). Two-truck runs: 0.92 and 0.92 of the summed single-truck predictions (pooled 95 % CI 0.77–1.06); GLS combination 0.82 (95 % CI 0.73–0.91).
- Gauges: a one-dimensional beam model predicts ch11/ch8 ratios of 0.978–1.003. Ratio of st36 to st40 constants: 3.24 ± 0.56 in lane A against 1.82 ± 0.10 in lane B (± one standard error), about 2.5 standard errors apart.
- Beam model (Euler–Bernoulli, parabolic haunch, second moment proportional to h^2): r^2 = 0.79–0.94 against the strain histories; zeros of the uniform-load moment in span 2 at 121.6 m and 190.8 m; strain constant of the gauges 0.69 of the largest on the girder (0.56–0.93 across rigidity laws); cancellation ratio R = 0.51; span 2 contributes about 170 % of the net integral and the adjacent spans −26 % and −66 %.

S4. Beam model of the five-span girder and synthetic records (item v)

The one-dimensional beam model of the five-span girder (Euler–Bernoulli, parabolic haunch) is described in Section 4.2 and in the notes of S3. Fig. S4 shows its observability along the girder, and Fig. S5 the synthetic records of the dataset authors processed with the same integration.

S5. Strain blind-locus maps (item vi)

Figs. S6 and S7 map the strain indicator N_M over the sensor position and the span ratio for two-span and symmetric three-span beams.

S6. Multi-channel placement and structure-aware weighting functions (item vii)

Fig. S8 shows the extremes of the uniform-load response $C(x)$ that the placement rule of Section 2.4 selects. Fig. S9 gives the Monte Carlo verification of Eqs. (13) and (14), and Fig. S10 the structure-aware weighting functions of Appendix B.

- Placement (Section 2.4): verified by a brute-force search over 96 cases and a Monte Carlo study with 10^5 random axle configurations per case; white-noise to offset ratio $\sigma^2\Delta x/(\delta_0^2 L_{tot}) \approx 5 \times 10^{-6}$ at σ = 0.01 mm, δ_0 = 0.1 mm, Δx = 0.1 m, L_tot = 220 m.

S7. Asymmetric three-span beams (item viii)

For arbitrary spans L_1, L_2, L_3 and rigidities EI_1, EI_2, EI_3, the two support moments follow from the three-moment equations at the inner supports, solved symbolically; the sensor deflection under a uniform load then follows by superposition, as in Appendix A. The general expressions are long and are given in the scripts. Four asymmetric cases agree with FE to a relative error of at most 9.2×10^{-12}. With the sensor at mid-span of span 1 and uniform rigidity, the blind ratio L_1/L_2 is 0.589774, 0.591969, 0.587260, 0.565712, 0.525757 and 0.461410 for L_3/L_2 = 0.3, 0.5, 0.6, 0.8, 1.0 and 1.2 (Fig. 2b).

S8. Cầu Mây model, admissible sets and frequencies (item ix); dynamics (item x); simply supported records (item xi)

- Cầu Mây design sections: depth 2.40 m (mid-span) to 5.40 m (piers), second moments 5.482 m⁴ and 59.61 m⁴, E_c = 36 057 MPa. Model-form variants: L_v = 40 and 45 m (base 44 m), exponents 2.5 and 3.2 (base 2.943), rigid pier zone ±1.5 m.
- Misfit ratio r_{87}: 1.126 at $\kappa = 10^7$ kN m/rad, minimum 1.058 at $\kappa = 1.68 \times 10^8$ kN m/rad (calibration B), 1.091 for fixed piers.
- Admissible set against tolerance τ (Table S7):

Table S7. Admissible set of the Cầu Mây model against the tolerance τ on the misfit of each gauge.

Tolerance, prior	κ (kN m/rad)	α	N8 indicator, αEI_mid	N8 indicator, design EI_mid	C_8 (m²/kN)
τ = 3 %	$1.0–3.0 \times 10^8$	0.64–0.80	–	–	–
τ = 4 %	$4.2 \times 10^7–2.0 \times 10^9$	0.54–0.98	–	–	–
τ = 5.3 %	$\geq 1.8 \times 10^7$	0.51–1.15	0.14–0.42	0.12–0.82	$3.0 \times 10^{-5}–2.0 \times 10^{-4}$
τ = 5.3 %, prior	–	–	0.14–0.27	0.12–0.30	–

Tolerance, prior	κ (kN m/rad)	α	N8 indicator, αEI_mid	N8 indicator, design EI_mid	C_8 (m²/kN)
α ∈ [0.9, 1.3]					

The processed acceptance-test data of the Cầu Mây Bridge are listed in Tables S8–S10. The longitudinal truck positions are given as drawings in the test report and are not tabulated.

Table S8. Cầu Mây acceptance test (June 2020): measured peak deflection (mm, downward positive) at the two gauge sections, at three measuring points across each section, under central and eccentric truck arrangements.

Section	Measuring point	Central	Eccentric
N8, side span, 0.4L from T8	right edge	5.32	5.91
N8, side span, 0.4L from T8	axis	5.56	5.55
N8, side span, 0.4L from T8	left edge	5.76	5.22
N7, mid main span	right edge	14.68	14.62
N7, mid main span	axis	15.24	15.51
N7, mid main span	left edge	15.83	16.67

Table S9. Weighed 3-axle test trucks: gross weight and axle spacings (front to middle axle; middle to rear axle) and track width. Mean gross weight 25.06 t.

Truck	Gross weight (t)	Front axle spacing (m)	Rear axle spacing (m)	Track (m)
1	24.7	3.45	1.35	1.9
2	25	3.65	1.45	1.85
3	25.66	3.45	1.35	1.85
4	25.06	3.85	1.35	1.85
5	25.05	3.45	1.35	1.85
6	25.3	3.65	1.45	1.85
7	25.1	3.7	1.45	1.9
8	25.5	3.65	1.45	1.9
9	24.6	3.65	1.45	1.85
10	24.6	3.6	1.45	1.85

Table S10. Vertical natural frequencies of the main-bridge spans reported in the acceptance test.

Span	Vertical frequency (Hz)
Side span T5–T6 (55 m)	3.43
Main span T6–T7 (90 m)	3.64
Side span T7–T8 (55 m)	3.63

Fig. S11 shows the predicted vertical frequencies against the scaled pier stiffness κ, Fig. S12 the static misfit over the plane of α and k, and Fig. S13 the closed-form Möbius law of Eq. (15) against FE.

The moving-force analysis behind the dynamic bound of Section 6 is reproduced by `s05_moving_force.py`; its console output (`s05_moving_force.log`) lists the quasi-static error against t_{cr}/T_1, the effect of damping and the axle-configuration spread under dynamics.

Figs. S14 and S15 show the deflection records of two simply supported bridges tested by the authors, which illustrate the baseline handling and the low-pass filtering recommended in Section 7.

Supplementary figure captions

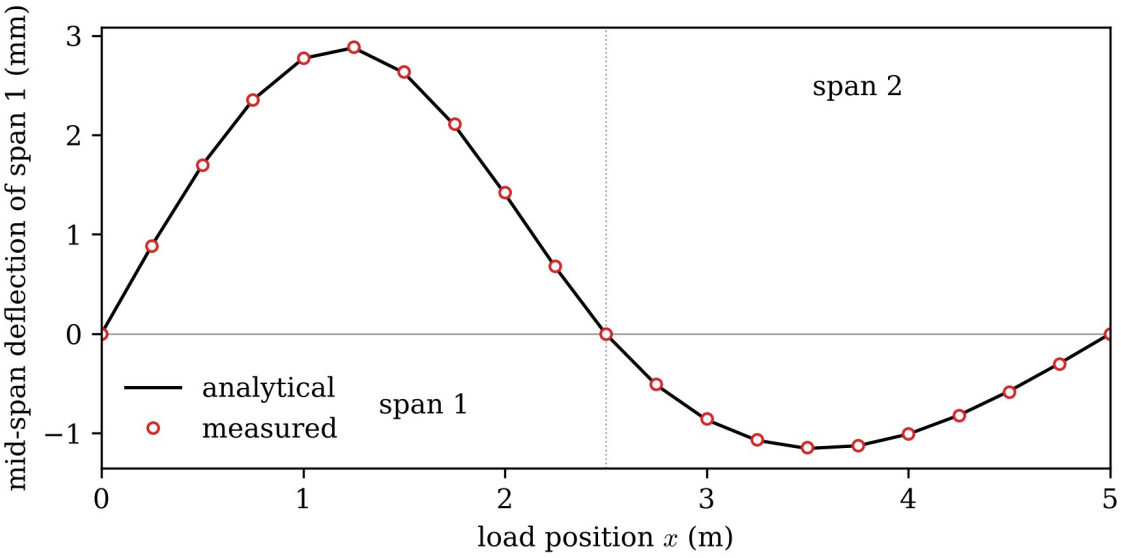


Fig. S1. Laboratory two-span beam: measured and analytical influence line of the mid-span deflection of the first span for the single 40.64 N load (Table S1).

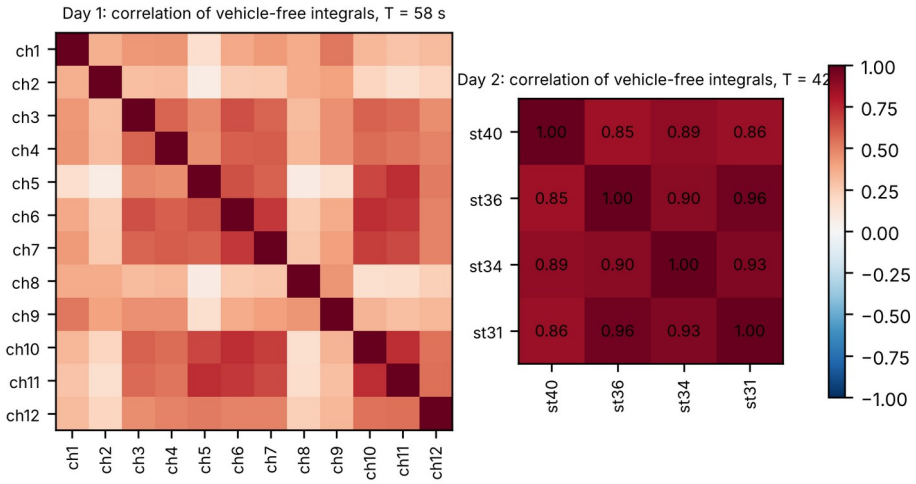


Fig. S2. NOR-BWIM: correlation matrices of the integrated vehicle-free noise between gauges, for windows of crossing length; day 1 (12 gauges) and day 2 (4 gauges).

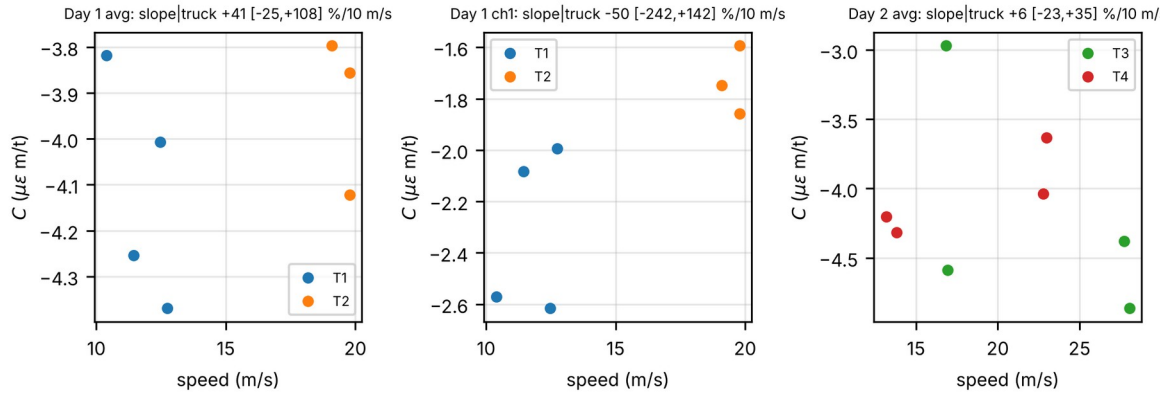


Fig. S3. NOR-BWIM: integral constant against speed for the day-1 gauge average, gauge ch1 and the day-2 gauge average, by truck; the panel titles give the fitted slope per 10 m/s with its 95 % CI.

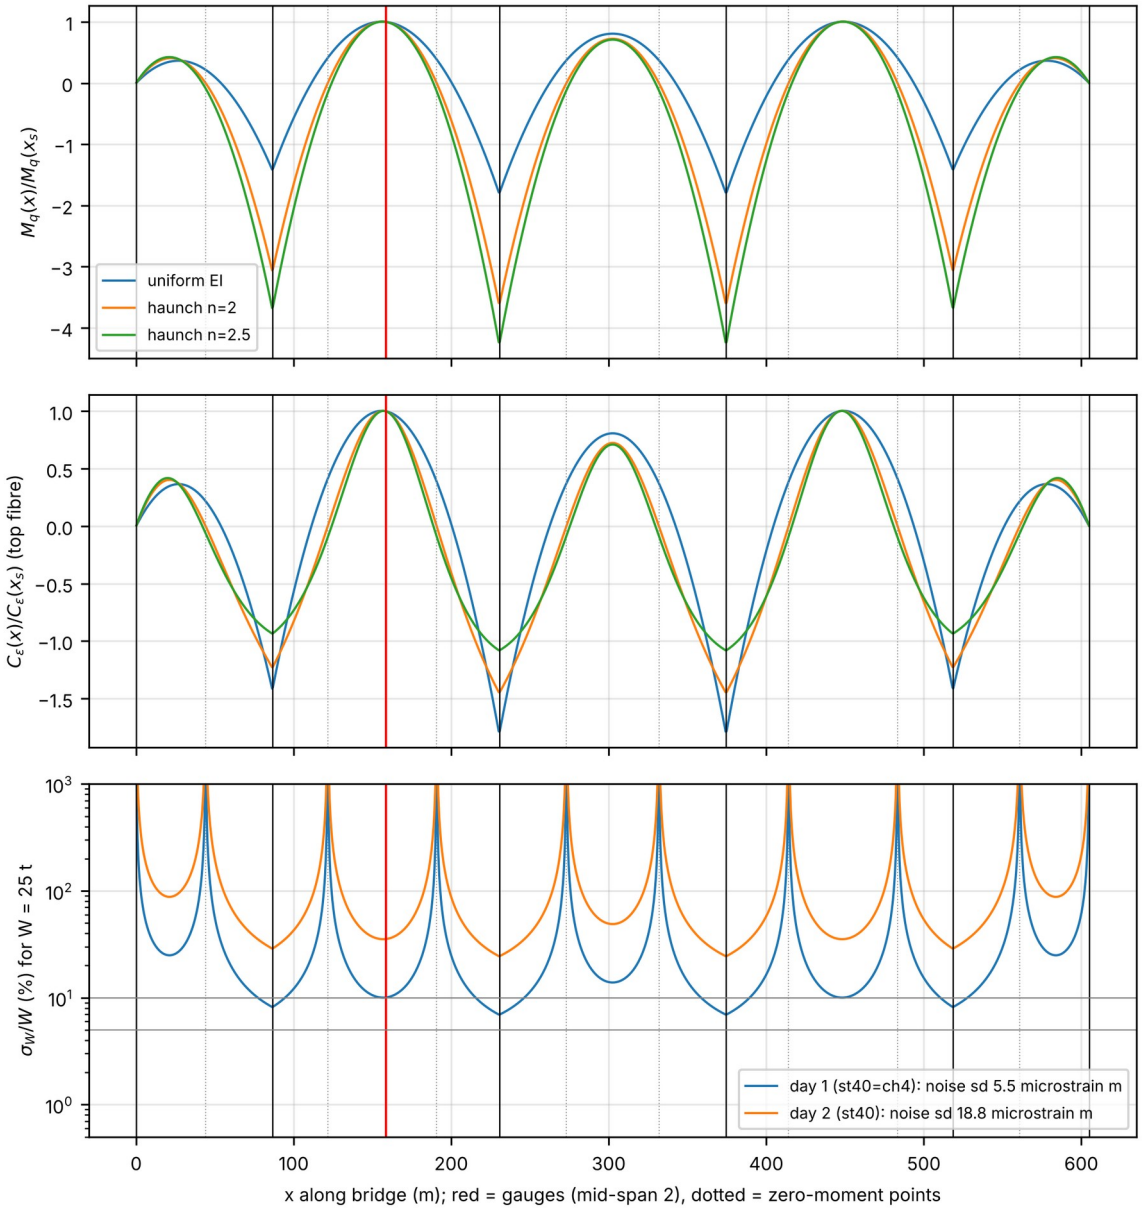


Fig. S4. Five-span girder, beam model with uniform rigidity and two haunch laws: uniform-load moment (top) and strain constant (middle) along the girder, normalised at the gauges, and the single-gauge error expected from the measured noise for a 25 t truck (bottom). Red line: gauge position; dotted lines: zero-moment points.

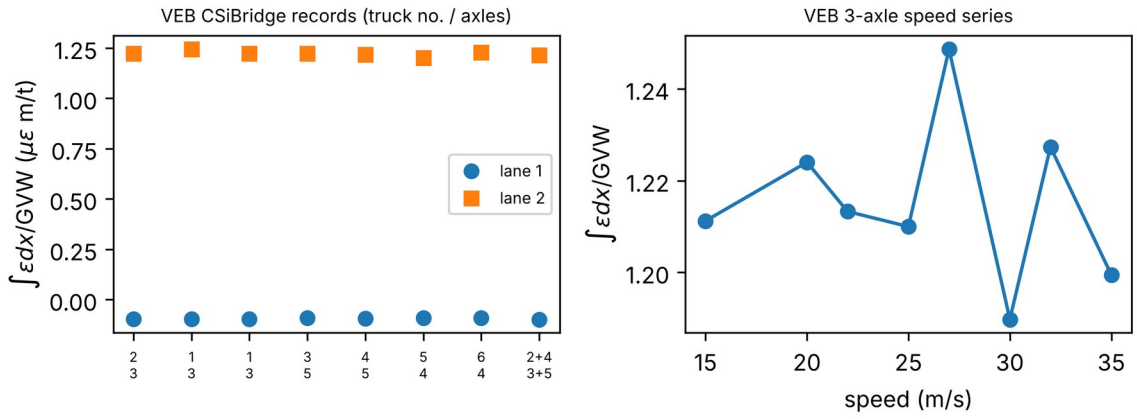


Fig. S5. Synthetic strain records of the dataset authors: integral per unit gross weight by truck and lane, and for a 3-axle truck against speed.

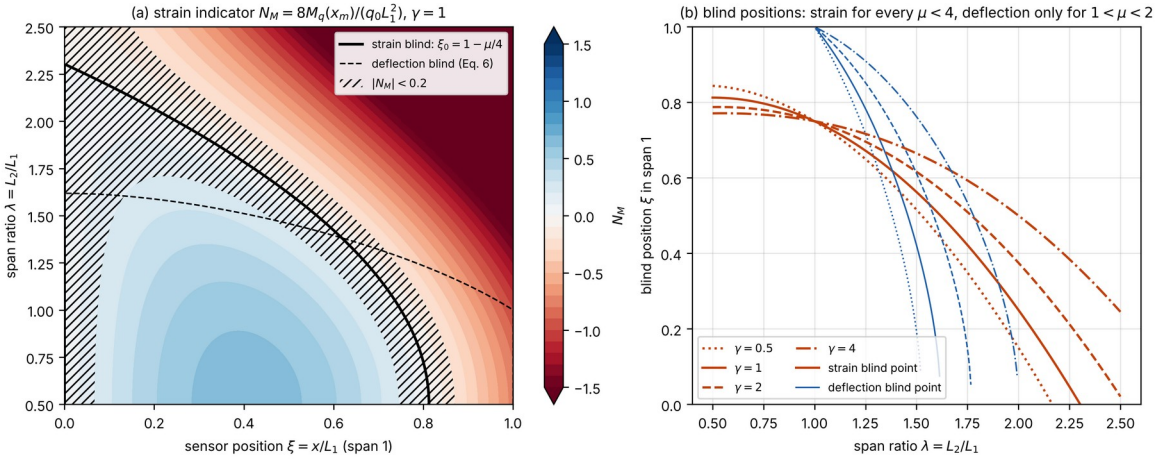


Fig. S6. Two-span beam: (a) strain indicator N_M over the sensor position and the span ratio λ, with the strain and deflection blind loci and the near-blind band; (b) blind positions against λ.

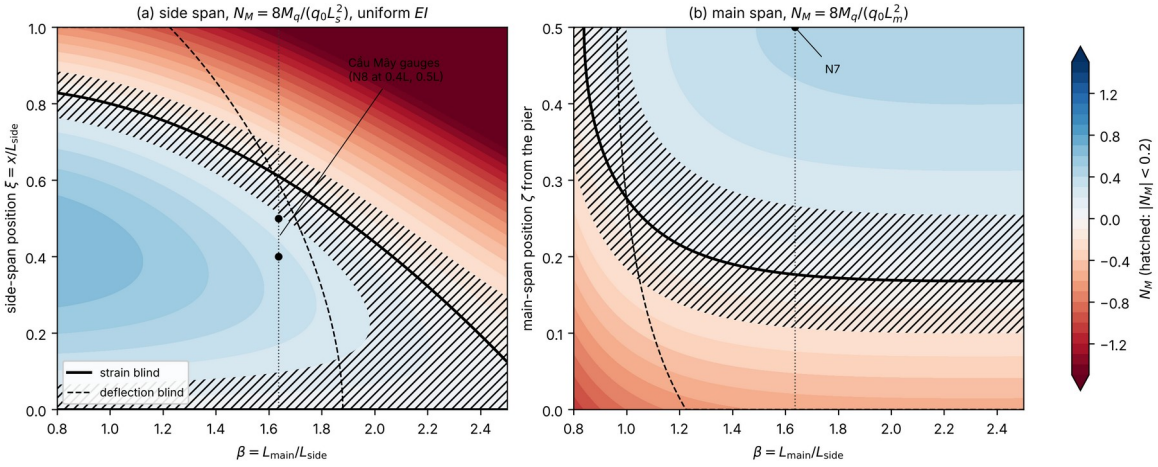


Fig. S7. Symmetric three-span beam: strain indicator N_M (a) in the side span and (b) in the main span measured from the pier, over the span ratio β, with the blind loci, the near-blind band and the Cầu Mây span ratio.

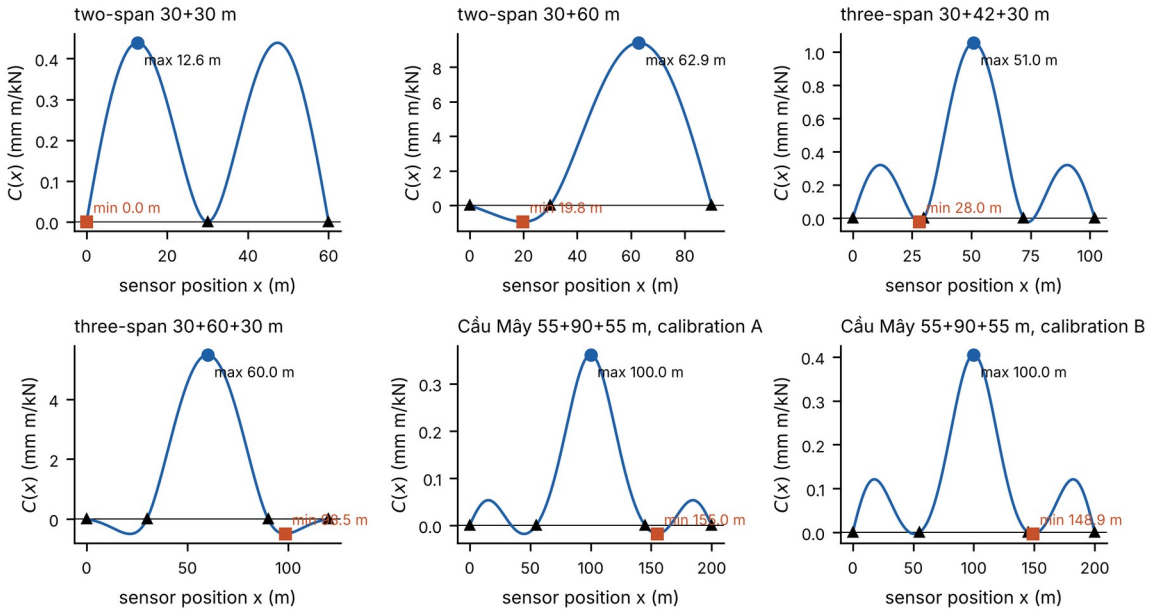


Fig. S8. Uniform-load response $C(x)$ along six girders (two-span, three-span and the Cầu Mây girder under calibrations A and B), with the maximum and minimum selected by the placement rule.

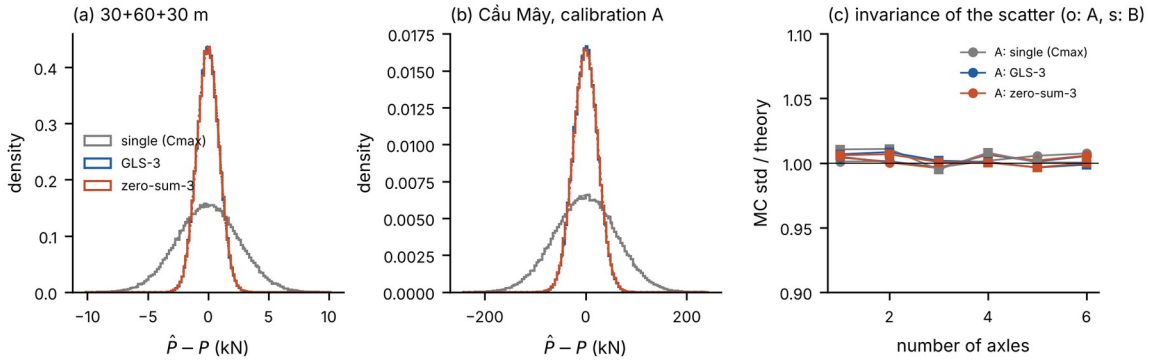


Fig. S9. Monte Carlo verification: distribution of the load error for a single gauge, GLS and the zero-sum estimator with three gauges, (a) on a 30 + 60 + 30 m beam and (b) on the Cầu Mây girder (calibration A), and (c) scatter against the number of axles relative to theory.

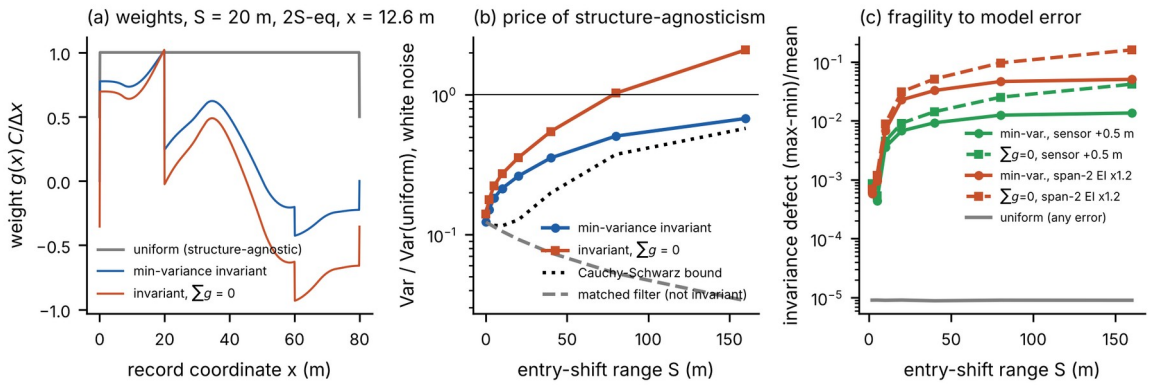


Fig. S10. Structure-aware weighting functions for two equal spans (Appendix B): (a) weighting functions along the record, (b) white-noise variance relative to uniform weighting against the range of entry shift, (c) configuration-dependent error under a rigidity error in the adjacent span.

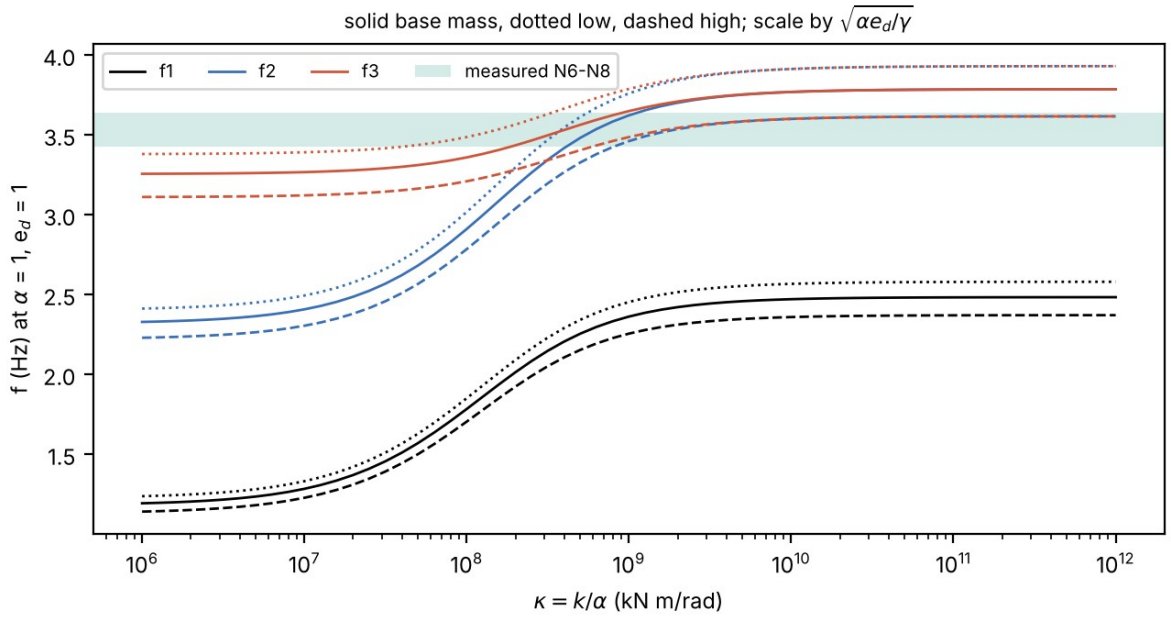


Fig. S11. Cầu Mây: first, second and third vertical frequencies against the scaled pier stiffness κ, for low, base and high mass, with the measured band.

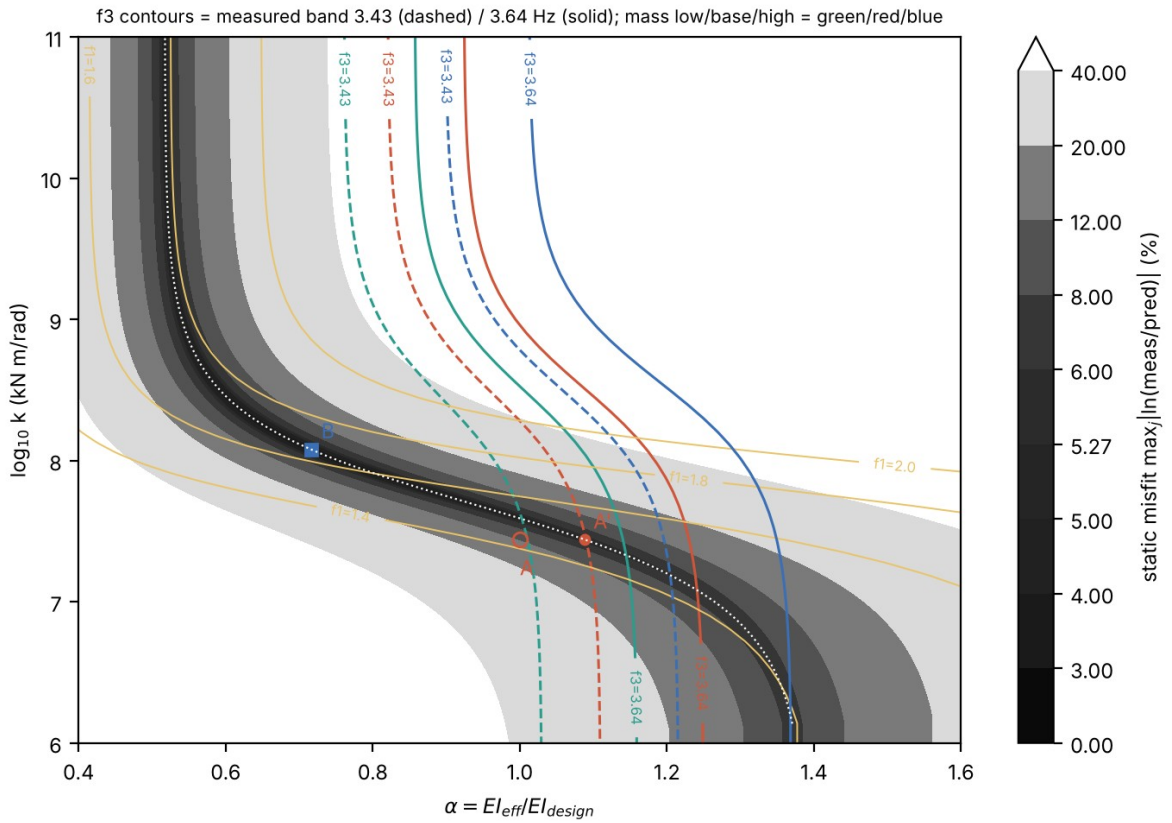


Fig. S12. Cầu Mây: static misfit over the rigidity factor α and the pier stiffness k, with contours of the third vertical frequency equal to the measured values.

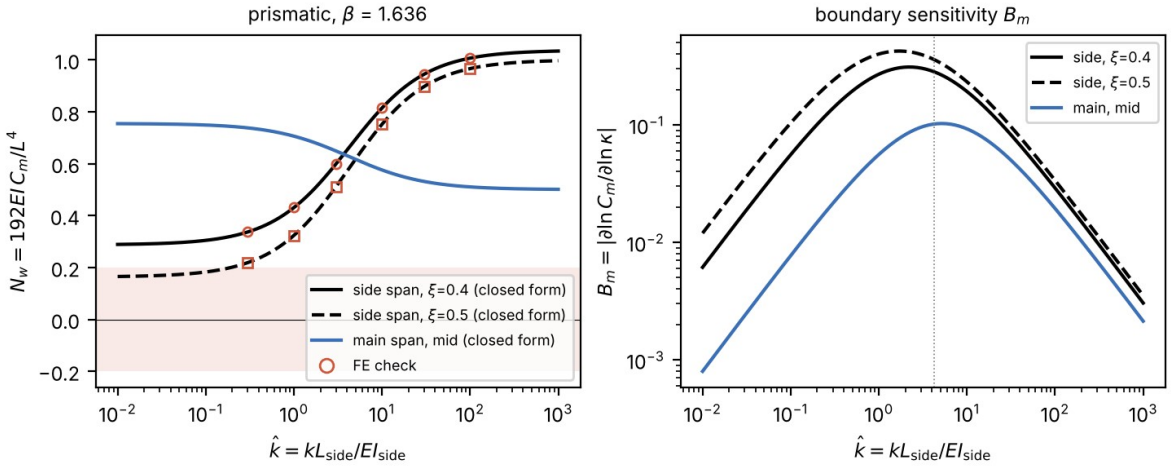


Fig. S13. Cầu Mây proportions, prismatic beam: (a) deflection indicators of the side-span and main-span gauges against the relative pier stiffness $\hat{k}$, closed form against FE; (b) boundary sensitivity B_m.

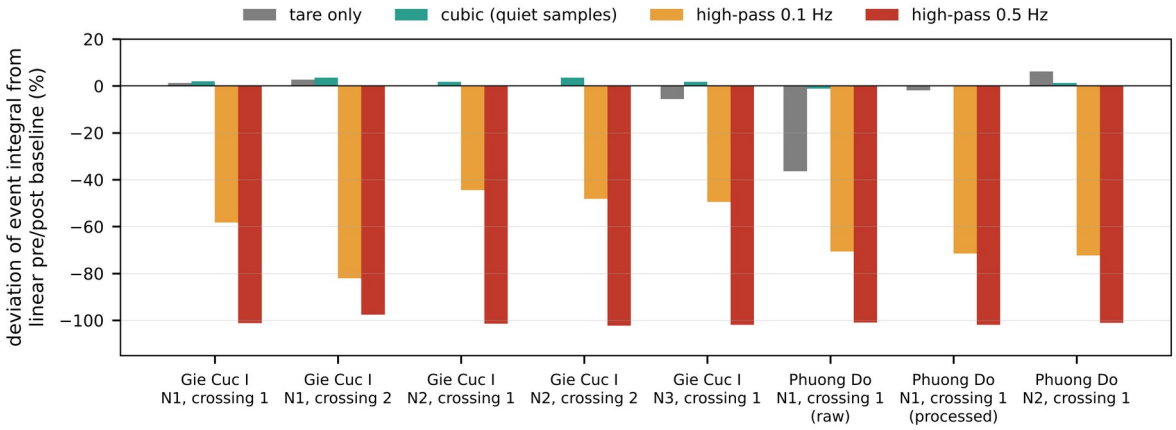


Fig. S14. Deflection records of two simply supported bridges (Gie Cục I and Phương Độ): deviation of the event integral from a linear pre/post baseline for several baseline treatments and high-pass filters.

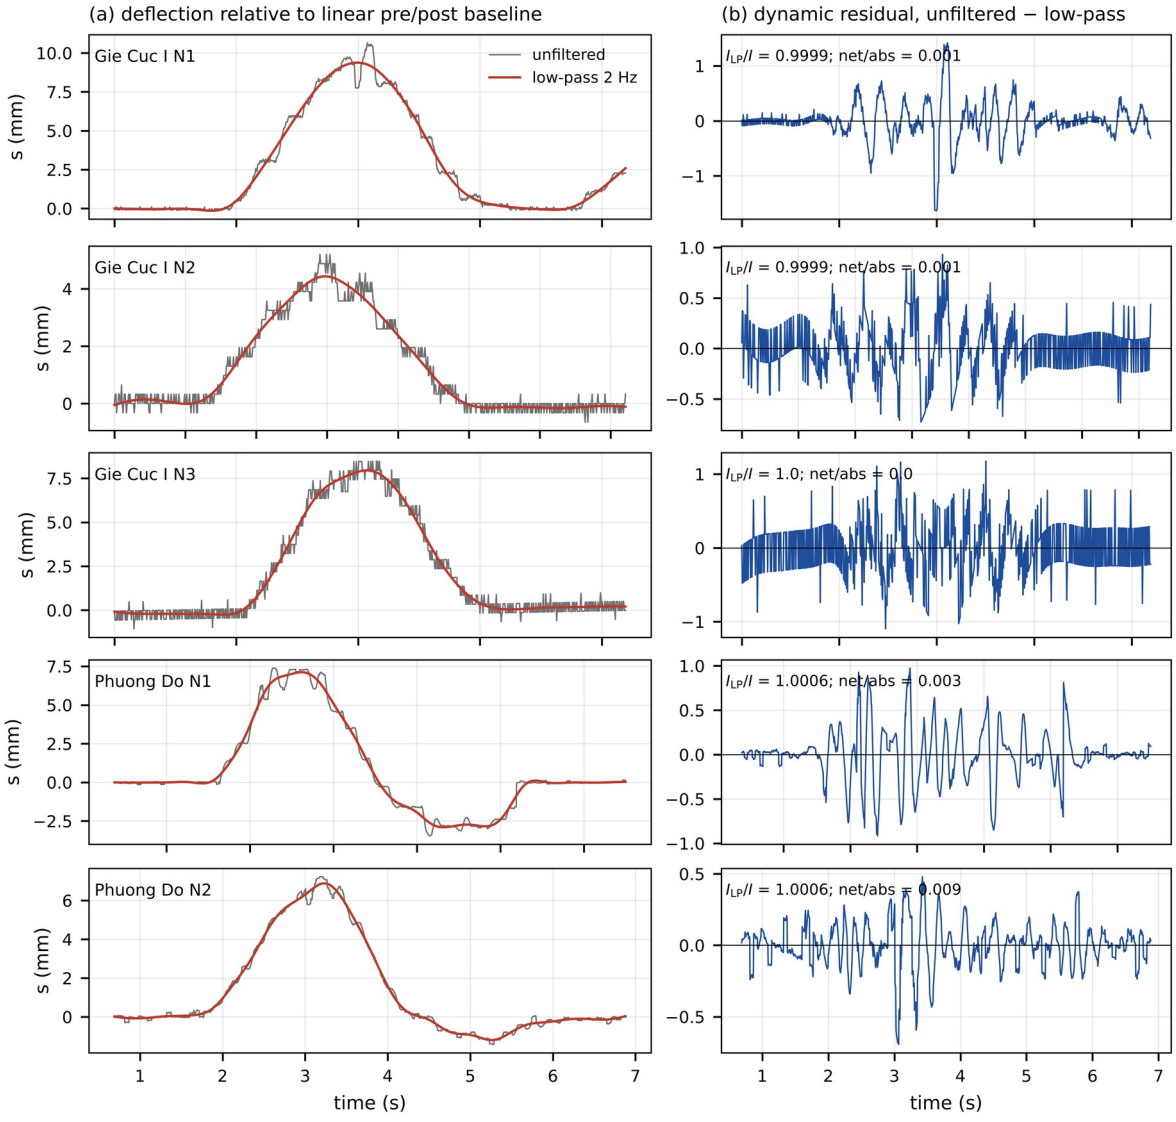


Fig. S15. The same records: (a) deflection relative to the linear baseline, unfiltered and low-pass filtered at 2 Hz; (b) dynamic residual removed by the low-pass filter.